



DIMENSIONS

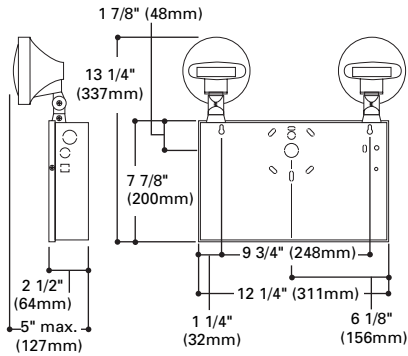

DESCRIPTION

The XR Series is an efficient, rugged, commercial grade emergency light. The XR Series, in 6V and 12V models, has the extra capacity to power remote heads for added application flexibility.



XR SERIES

Steel

EMERGENCY LIGHT

ELECTRICAL RATINGS

Model	Battery	Rated Wattage to 87 1/2% of rated D.C. Voltage					Lamp Information		
		DC Voltage	1 1/2 hours	2 hours	3 hours	4 hours	Type	Wattage	Number
XR3	SLC	6	27	24	18	14	Incandescent	9	29-84
XR3347 ⁽²⁾	SLC	6	27	24	-	-	Incandescent	9	29-84
XR5	SLC	6	27	24	18	14	Halogen Sealed Beam	6	29-37
XR7	SLC	6	36	30	20	16	Incandescent	9	29-84
XR9	SLC	6	54	48	36	28	Tungsten Halogen	6	29-12
XR11	SLC	6	54	48	36	28	Incandescent	9	29-84
XR11347 ⁽²⁾	SLC	6	54	48	-	-	Incandescent	9	29-84
XR12206347 ⁽²⁾	SLC	12	36	30	-	-	Incandescent	9	29-86
XR12208347 ⁽²⁾	SLC	12	54	48	-	-	Incandescent	9	29-86
XR12206	SLC	12	36	30	20	16	Incandescent	9	29-86
XR12208	SLC	12	54	48	36	28	Incandescent	9	29-86
XR15	SNC	6	15	12	8	6	Incandescent	7.2	29-88
XR16	SNC	6	24	18	14	10	Incandescent	7.2	29-88
XR17	SNC	6	50	36	28	20	Incandescent	7.2	29-88
XR20	SNC	12	30	24	18	14	Incandescent	9	29-86
XR21	SNC	12	50	36	28	20	Incandescent	9	29-86

SLC=Sealed Lead Calcium Battery
SNC=Sealed Nickel Cadmium Battery

ORDERING INFORMATION

SAMPLE NUMBER: XR3TDM

Model Number	Options (Add as suffix)	Accessories (Order separately)
XR3	A=Ammeter	1BRWH=Mounting Brackets (2-White Finish)
XR3347	MH=Metal Heads	1MSWH=Mounting Shelf (White Finish)
XR5	SD=Self-Diagnostics (XR3, XR5, XR12206, XR12208, XR15, XR16, XR20, XR21 Only)	VK1=Voltmeter
XR7	TDM=Time Delay Monitor	CSK120=Cord Set 120VAC
XR9	V=Voltmeter	CSK277=Cord Set 277VAC
XR11	Alternate Lamps ⁽¹⁾	WG1=Wire Guard
XR11347	Other Finishes ⁽¹⁾	VS2=Polycarbonate Vandal Shield
XR12206	Other Options ⁽¹⁾	VS2WP=Polycarbonate Vandal Shield - Weatherproof
XR12206347		
XR12208		
XR12208347		
XR15		
XR16		
XR17		
XR20		
XR21		

Energy Data

Model No.	Input Current (Max.):	
	120V	277V
XR3, XR5, XR7, XR9, XR11	.12A	.05A
XR12206, XR12208	.30A	.13A
XR15	.06A	.03A
XR16	.07A	.04A
XR17	.08A	.05A
XR20	.13A	.06A
XR21	.15A	.07A

Note: 0, 1, 3 & 4 Heads also available. Specify after catalog number (i.e., XR11484).

⁽¹⁾ Consult your Cooper Lighting Representative. ⁽²⁾ 347=120/347V

- Dual-voltage input 120/277VAC, 60Hz
- 22 gauge die formed steel housing
- White powder coat finish
- White, high impact, thermoplastic
- (2) fully adjustable thermoplastic heads - top mounted (side mounting optional)
- Knockout, conduit or cord set
- Universal J-box mounting pattern, keyhole slots
- Remote capability
- Line-latching, Solid-State voltage limited charger, Solid-State switching, low-voltage disconnect, brownout circuit, overload/short-circuit protection, test switch/power indicator light
- UL 924 Listed, CSA Certified, Life Safety NFPA 101, NEC/OSHA, most state and local codes